


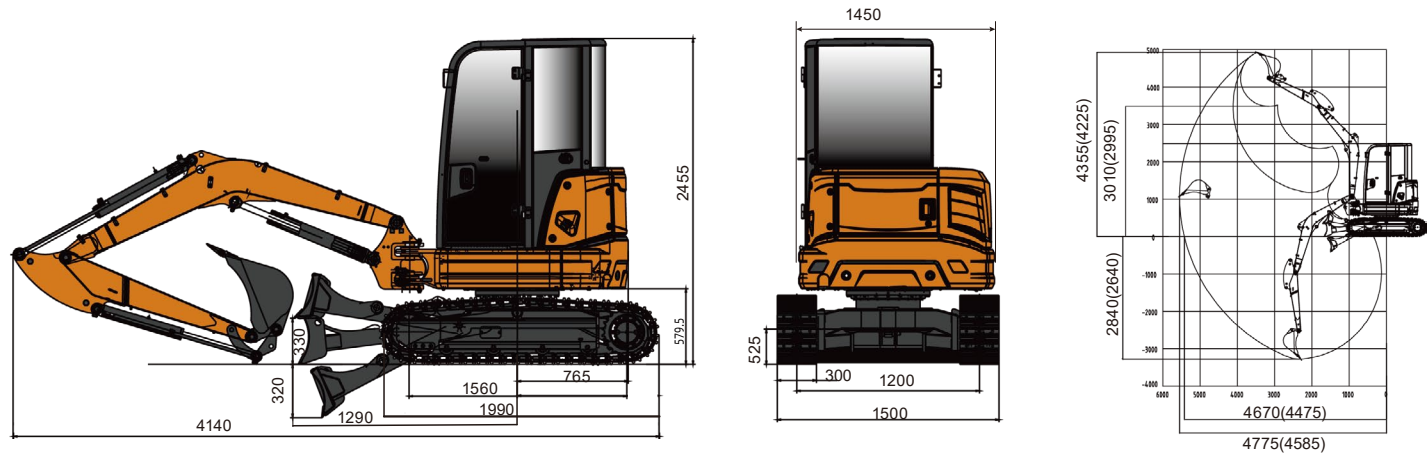

Lonking 龙工
Efficiency Rules the Future

CDM6025 MINI EXCAVATOR

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	2650 kg
	Standard bucket Capacity	0.08 m³
	Standard bucket Width	580 mm
	Max.Travel speed	2.6/4.4km/h
	Max.Swing speed	10 rpm
	Grade ability	30°
	Ground pressure	25.1 kPa
	Max.Traction force	30.7 KN
	Boom swing angle (L/R)	65°/50°
Engine	Engine brand	YANMAR
	Engine model	3TNV80F
	Rated power	14.6 kW/2400 rpm
	Displacement	1.267 L
	Fuel tank	26 L
Hydraulic	Max.Flow(total)	2×28.8+19.2+6.5 L/min
	Max.Working pressure	23.5 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	14(15.8) kN
	Max.Bucket digging force	24 kN
	Hrdraulic oil tank	41 L
Chassis	Track width	300 mm
	Track type	Steel crawler
	Carrier rollers number	1(each side)
	Track rollers number	4(each side)
Electric	System vottage	12 V
	Battery capacity	12 V,45 Ah

PRODUCT FEATURES

- Yanmar strong power engine,which meet U.S. EPA Tier 4 Final, EU Stage V.
- The combination of zero-tail swing and boom deviation is designed for narrow and complicated working scenarions.
- Wider space and view are provide by enlarged front windscreen and sunroof.
- Color monitoring digital and analogue combined display
- The door and hood can be opened completely to ensure easy and convenient maintenance.

STANDARD EQUIPMENT

- Fops/Tops cabin
- Suspension seat
- Warm air blower
- Hydraulic pilot control rod
- Deflectable boom
- Warning light
- Breaker pipeline

OPTIONAL EQUIPMENT

- Electro-hydraulic proportional joystick
- Front safeguard
- Fops/Tops canopy
- 300mm width bucket
- 1000mm width bucket
- Quick hitch pipeline
- 300mm rubber tracks



The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;

- OPERATING WEIGHT: 2650kg
- ENGINE POWER: 14.6kW
- BUCKET CAPACITY: 0.08m³
- TRAVEL SPEED: 2.6/4.4km/h